


Order no.: 063249

Rigid wall anchor 200 mm, galvanised steel

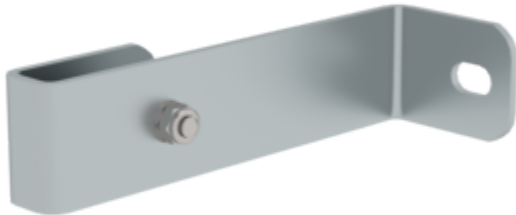

Specification

| | | | | |
|--|--------------------------------------|--------------------------------------|--------------------------------------|---|
| Wall distance 200 mm | Wall anchor Single | Material Galvanised steel | Weight 0.96 kg | Transport dimensions 235 x 117 x 60 mm, 0.96 kg |
| Business division MUNK Günzburger Steigtechnik | Order no. 063249 | Price € 23.00 | Spare part for article no. 500115 | Spare part for article no. 500120 |
| Spare part for article no. 510100 | Spare part for article no. 520125 | Spare part for article no. 500105 | Spare part for article no. 500125 | Spare part for article no. 500110 |
| Spare part for article no. 500100 | Spare part for article no. 520120 | Spare part for article no. 520105 | Spare part for article no. 520110 | Spare part for article no. 510125 |
| Spare part for article no. 510115 | Spare part for article no. 520100 | Spare part for article no. 520115 | Spare part for article no. 510120 | Spare part for article no. 510110 |
| Spare part for article no. 510105 | | | | |

Facts

- Optimum stability thanks to rigid mounting mechanism
- Wall anchor made of galvanised steel for long-lasting stability
- Stable and durable steel construction for high loads
- Wall anchor

Scope of supply

- Wall anchor: 1 x
- Assembly instructions: 1 x

Information on sustainability criteria

- Corporate certification: ISO 9001
- Corporate certification: ISO 14001
- Corporate certification: EN 1090
- Corporate certification: EcoVadis
- RoHS
- REACH
- The MUNK Group complies with a Code of Conduct
- The Supply Chain Act does not apply due to our size
- The materials used are listed in the technical specification
- Resource-saving production: own photovoltaic systems
- Energy-efficient consumption during production: LED lighting
- Repairability, durability and quality: 15-year warranty on series products made in Germany
- Recyclability: Our products are mostly made of aluminium, steel or wood and can be fed directly into the recycling process.
- Socially acceptable working conditions in production: fair wages, gender equality
- Economical and recyclable packaging: no use of polystyrene, predominantly use of wood and cardboard, small amounts of plastic
- No health hazards for the users

More product pictures

Added value

Optimum planning

- Practical planning aids (available as [Downloads](#)) with tips for correct planning of vertical ladder systems
- Planning in close coordination with the client as well as the place and purpose of use
- Joint project planning



All [fixed ladders / vertical ladders](#) at a glance:

- [Single-flight vertical ladders](#) in accordance with DIN 18799-1/-3, DIN 14094-1 and DIN EN ISO 14122-4 (depending on the choice of standard and the situation on site at the exit, additional components such as exit steps, railings and safety doors may be required)
- DIN 18799-1: Stationary multiple-flight vertical ladders [on buildings](#)
- DIN 14094-1: Multiple-flight [emergency ladder systems \(emergency ladders\)](#)
- DIN EN ISO 14122-4: Stationary multiple-flight vertical ladders [on machinery](#)

Corporate certifications

on sustainability criteria



Management System
ISO 9001:2015
ISO 14001:2015
www.tuv.com
ID 9108612548



Nachhaltigkeit
EcoVadis
sustainable supply management
CSR-Rating in Silber 2022

